



# MINIATURE HIGH PERFORMANCE PRESSURE SENSOR

## 4-20mA - ASUH SERIES - UP TO 6000 PSI

The ASUH Series of high performance sub-miniature pressure transducers have been designed for demanding installations where space is extremely limited and high vibration and temperature are anticipated.

This new design utilizes miniaturized hybrid components which allow savings in size and weight. The transducer has an enhanced performance at elevated temperature and is optimized for extreme installations such as on-engine or transmissions.

The modular construction and programmable amplifier provide a fast delivery time for standard and custom configurations. Pressure ranges are available between >500 to 6000 psi. For OEM applications we have many options available to customize these transducers.

### TECHNICAL SPECIFICATIONS

<b>Pressure Reference</b>	Absolute, Gauge and Sealed gauge
<b>Standard Pressure Ranges (psi)</b>	750, 1500, 3000, and 6000 <i>Any range &gt;500 psi can be specified</i> <i>For ranges below 500 psi see ASUH Low Range datasheet</i>
<b>Proof Pressure (overload)</b>	200% of range
<b>Burst Pressure</b>	>500% of range
<b>Accuracy</b>	±0.25% FS Combined Linearity & Hysteresis (CNLH)
<b>Thermal Effects</b>	Zero ±0.01%FS/°F (Sensitivity ±0.01% of Reading /°1)
<b>Output</b>	4-20mA (±0.5%)
<b>Power Supply</b>	9-40Vdc
<b>Operating Temperature Range</b>	-40°F to 300°F (-40°C to +150°C)
<b>Compensated Temperature Range</b>	Standard temperature ranges-See Configurator on back page <i>Any range can be selected over the operating temperature.</i> <i>But for non-standard ranges please consult the factory.</i>
<b>Bandwidth</b>	1000Hz standard <i>Other frequencies available - please consult the factory.</i>
<b>Construction</b>	Stainless steel
<b>Electrical Connection</b>	20in 26AWG, 55spec wire + DR25 sleeve or Hermetic Connector - 8STA1-Y02-05PN170
<b>Process Connection</b>	3/8-24UNF (-3), 5/16-24UNF (-2), M6 x 1, M8 x 1 and M10 x 1
<b>Protection Class</b>	IP67 (Cable Option) Hermetic Seal (Connector Option)
<b>EMC Protection</b>	EN 50082-1
<b>Vibration</b>	Mil-Std-810C, curve L, 20G
<b>Weight</b>	0.95oz - Including cable 0.7oz - Connector option
<b>Options</b>	Cable length, connector fitted, thread size and labelling

PMC adopts a continuous development program which sometimes necessitates specification changes without notice.

## Process Measure Control

### Features

- Lightweight
- >500 psi to 6000 psi
- ±0.25% Accuracy
- 4-20mA
- -40 to +300°F


### Applications

- Compressors
- Generators
- Hydraulics
- Fluid
- Test
- Air


### Contact

PMC-STs, Inc.  
11 Old Sugar Hollow Rd  
Danbury, CT 06810  
Tel: 203-792-8686  
Fax: 203-743-2051  
www.pmc1.com

Represented by:



# Part Number Configurator

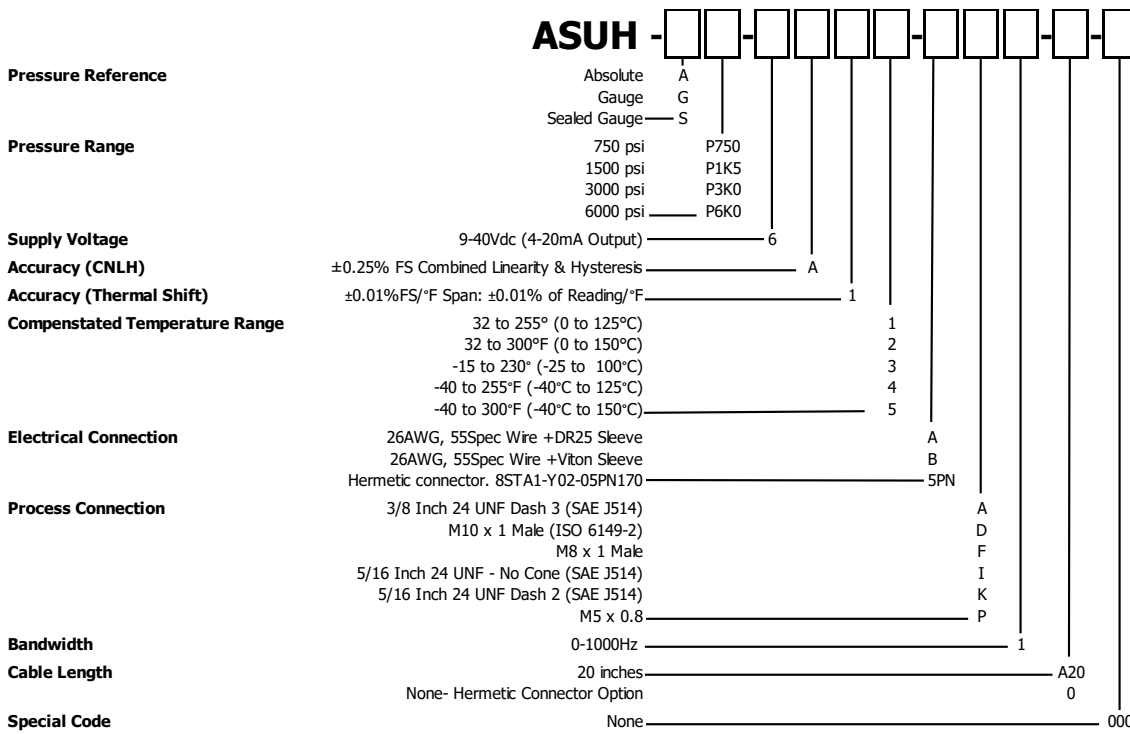

## Process Measure Control

### Sensors for

- Temperature
- Acceleration
- Pressure
- Position
- Torque
- Speed
- Angle
- Force

### Services for


- Data Logging
- Telemetry
- Controls
- Wiring

### PMC Sensors is

- Engineering led
- Confidential
- Experienced
- Responsive
- Dynamic
- Friendly

## MECHANICAL DETAILS

Dimensions in inches

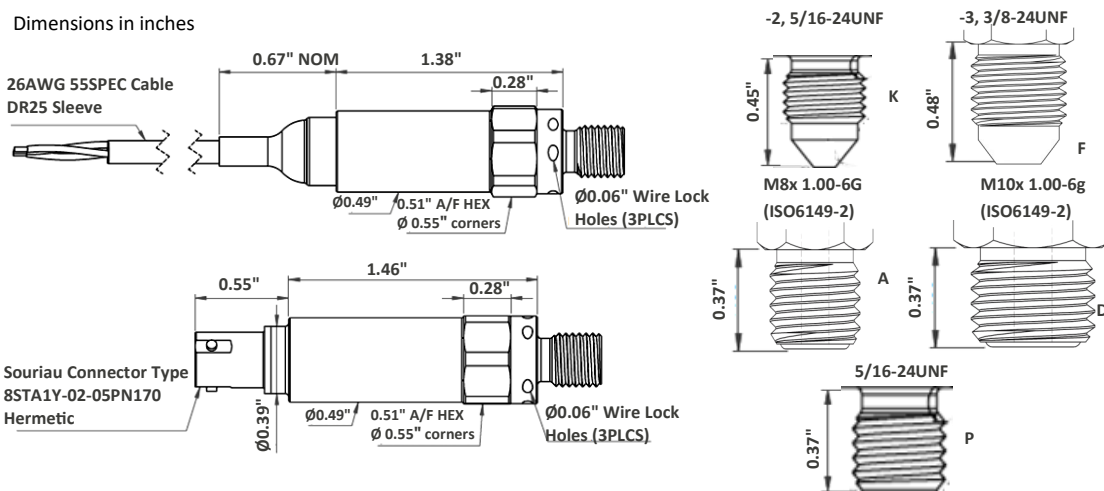

## ELECTRICAL DETAILS

Cable Option		
+Ve Supply	0V Supply	Factory use only
Red	Black	White

Hermetic Connector Option			
+Ve Supply	GND	Factory use only	Not Connected
Pin 1	Pin 2	Pin 3	Pin 4 & 5

## Precision Pressure, Temperature and Level Measurement for Industry